


L-Shaped Seals & Gaskets

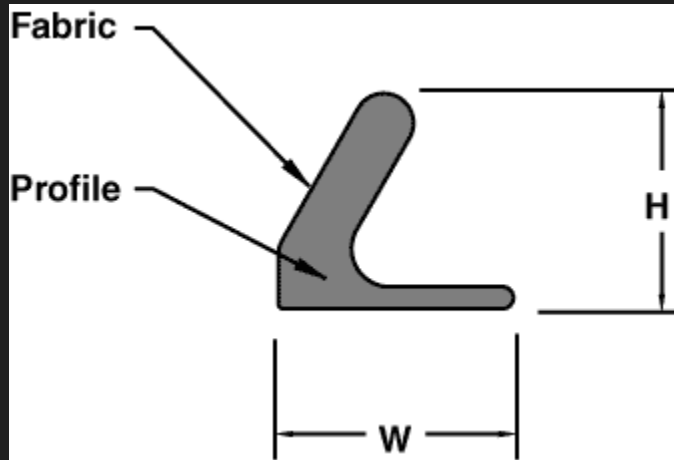

Profile	H	W
PL3942	.385 (9.8mm)	.420 (10.7mm)
PLXXXX	Custom	Custom

Custom Manufacturing Options for L Gaskets

We can customize any profile gasket. With the ability to produce shielding tape and fabric in-house as well, we can combine several different elements into a single shielding solution to fit your needs.

JEMIC's standard E-Series profile gaskets contain a closed cell foam core wrapped with a plated fabric. Our fabric-over-foam continuous strip gaskets have excellent shielding effectiveness (SE), high durability, low compression set and low resistance.

Shielding Effectiveness	> 85dB attenuation from 20 MHz to 10 GHz
Electrical Resistance	< 0.1 Ohms/Sq
Compression Deflection	< 1 lb/in
Compression Set	15-19 percent 15 percent at 70 °F. (21 °C.) 19 percent at 158 °F. (70 °C.)
Service Temperature	-40 °F. (-40 °C.) to 158 °F. (70 °C.)

Note

The gasket geometry and application may influence shielding effectiveness, compression deflection and compression set.